





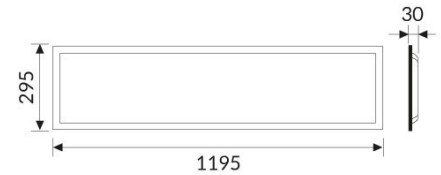


ABSENT ESSENTIAL DPL

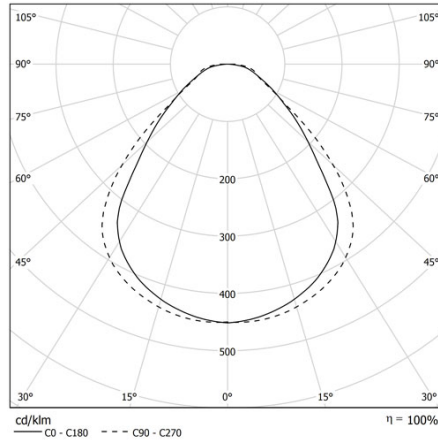

CODE		FLUX	SIZE	CERTIFICATIONS
41DPL36K4EM3	36W 4000K	4140lm	1195x295mm	   

Optics

Diffuser with Diamond Prism LED (DPL) technology for controlled emission UGR<19.

Body

Aluminum with epoxy powder coating.

Technical features

- >115 lm/W
- CRI >94
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h
- 5 years warranty

Legal reference

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97