

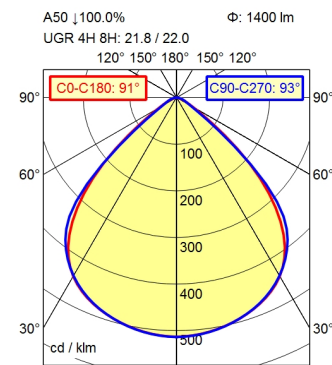


M12-A-5

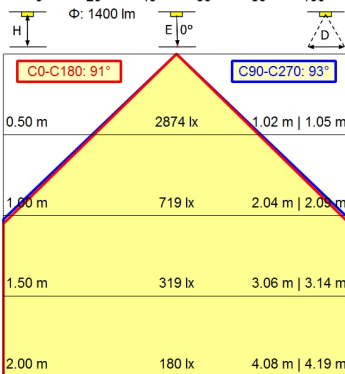

100 x 100 cm Φ : 1400 lm
 Em: 530 lx
 Emax: 685 lx
 Emin: 360 lx



- light source
- work equipment
- connected load
- power consumption
- luminous flux
- luminous efficiency
- light distribution
- beam angle
- colour temperature
- colour temperatur
- color rendering index (CRI)
- chromaticity tolerance LED
- glare control
- luminance (L65)
- unified glare rating (4H 8H)
- system of protection
- class of protection
- technology
- operation
- housing
- cover
- weight (net)
- mains lead
- fastening
- dimension
- special features

- LED
- without
- 24 V, DC
- env. 12 W
- approx. 1.400 lm
- approx. 117 lm/W
- direct
- 91°
- neutral white
- approx. 5.000 K
- >= 80
- < 3 SDCM
- screen
- <= 5200 cd/m²
- <= 22
- IP 67
- III
- multi-stage switchable
- external
- aluminium; anodised; aluminium coloured
- anodised
- glass screen
- env. 0,98 kg
- built-in plug; M12-A-5
- snap-fit
- A=398 mm
- ADVANCED package

Recessed luminaire ACURIA.perfect
APE 1450/850/MS
114319000-00806661
