
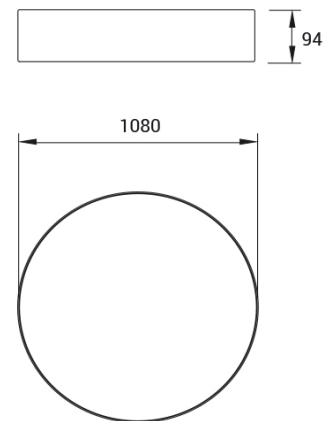
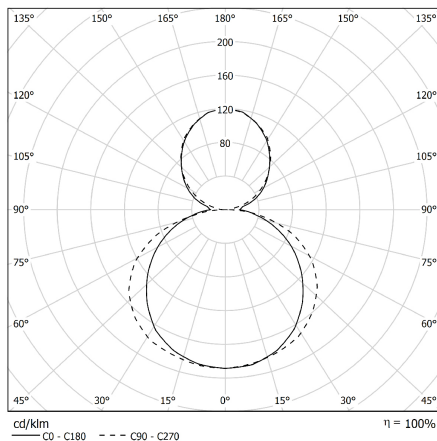


## BEN MAXI IP40 PG Double Emission

Frosted Acryl-Satiné impact resistant.

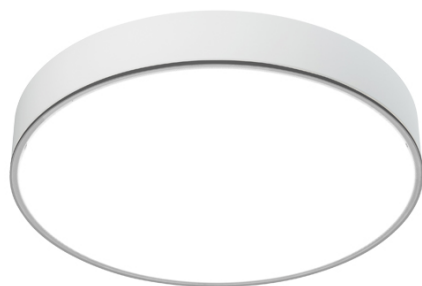

CODE		FLUX	SIZE	CERTIFICATIONS
10DI161PGK4	161W: 125W+36W 4000K	21316lm	Ø 1080mm	  

### Optics

PG diffuser with frosted Acryl-Satiné and impact resistant diffuser UGR<22.

### Body

Spun aluminum with epoxy powder coating.

### Specifications

Integrated driver;  
CRI>90;  
Mac Adams 3;  
Life Time: L80/B10 >50.000h;  
5 years complete warranty;  
Eye safety: RG0/RG1 in accordance with EN62471:2009

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97