

**BEN** is the **universal luminaire for wall, ceiling, suspension or recessed installation** with bodies made entirely of **aluminum**, without welding. The IP 40 version offers **both satin and microprismatic diffusers** with DPL UGR<19 technology. The mid-power LED on circular boards avoid the creation of shadow areas and are connected to the internal supports via quick connectors, for easy electrification.

☑ **Features**

- Direct emission
- UGR<19; <22
- IP 40

💡 **Led**

- 3000K/4000K
- >124 lm/W
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B20 >80.000h

🕒 **Specifications**

- Built-in driver
- PG diffuser in satin-finish acrylic resistant to UGR<22 shocks
- Impact resistant DPL diffuser with homogeneous and controlled emission UGR<19 (accessory)

📦 **Body**

- Aluminum with epoxy powder coating

🎨 **Colors**

- Matte white RAL 9003 - code B

★ **Certifications**

- CE Conformity
- RETILAP Conformity
- ETL Conformity
- Energy efficiency C
- 5 years warranty
- ETL certification

↔ **Related products**

- BEN suspended/ceiling (p. 114)
- BEN IP54 (p. 327)

📄 **On request**


- DALI - code D
- Bluetooth - code BT\*
- Emergency 1 hr - code EM\*
- Emergency 3 hrs - code EM3H\*
- 2700K - code K27\*
- Human Centric Lighting\*

\* Where available



## BEN\_\_\_SMALL IP40 PG

PG diffuser with frosted Acryl-Satiné and impact resistant diffuser UGR<22.

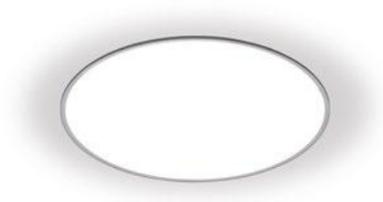

*Recessed mount accessory not included.*

Cod. 4000K	Led	lm	Ømm
10PG6K4	6W	798	257
10PG12K4	12W	1598	257
10PG18K4	18W	2394	257

Cod. 3000K	Led	lm	Ømm
10PG6K3	6W	742	257
10PG12K3	12W	1486	257
10PG18K3	18W	2226	257

## BEN\_\_\_MEDIUM IP40 PG

PG diffuser with frosted Acryl-Satiné and impact resistant diffuser UGR<22.



*Recessed mount accessory not included.*

Cod. 4000K	Led	lm	Ømm
10PG15K4	15W	2111	397
10PG21K4	21W	2887	397

Cod. 3000K	Led	lm	Ømm
10PG15K3	15W	1963	397
10PG21K3	21W	2684	397

## BEN\_\_\_LARGE IP40 PG

PG diffuser with frosted Acryl-Satiné and impact resistant diffuser UGR<22.



*Recessed mount accessory not included.*

Cod. 4000K	Led	lm	Ømm
10PG58K4	58W	8072	620
10PG96K4	96W	12710	620

Cod. 3000K	Led	lm	Ømm
10PG58K3	58W	7507	620
10PG96K3	96W	11820	620

## BEN\_\_\_XL IP40 PG

PG diffuser with frosted Acryl-Satiné and impact resistant diffuser UGR<22.



Cod. 4000K	Led	lm	Ømm
10PG70K4	70W	9564	850
10PG150K4	150W	20550	850



Cod. 3000K	Led	lm	Ømm
10PG70K3	70W	8895	850
10PG150K3	150W	19111	850

## BEN\_\_\_MAXI IP40 PG

PG diffuser with frosted Acryl-Satiné and impact resistant diffuser UGR<22.



Cod. 4000K	Led	lm	Ømm
10PG125K4	125W	16496	1080
10PG185K4	185W	24420	1080



Cod. 3000K	Led	lm	Ømm
10PG125K3	125W	15341	1080
10PG185K3	185W	22711	1080

## ACCESSORIES



DPL diffuser (UGR<19) for IP 40 versions.

**10AADPLS** - BEN SMALL  
**10AADPLM** - BEN MEDIUM  
**10AADPLL** - BEN LARGE  
**10AADPLXL** - BEN XL  
**10AADPLMX** - BEN MAXI



Kit for recessed frameless installation on plasterboard.

**10AA19SF** - BEN SMALL  
**10AA19MF** - BEN MEDIUM  
**10AA19LF** - BEN LARGE  
**10AA19XL** - BEN XL  
**10AA19MX** - BEN MAXI



Kit for recessed installation on plasterboard and concrete.

**10AA19S** - BEN SMALL  
**10AA19M** - BEN MEDIUM  
**10AA19L** - BEN LARGE