

THOR D51 / D51 THOR/0 / THOR/0 LED / D51/0-EL83-GR

Product Info




Item code	THOR D51 / D51/0-EL83-GR
Category	Step light, Wall recessed
Environments	urban landscape, façades and architectural works, wellness, hallway, places of worship
Mounting type	with rough-in housing
Body	Housing and trim in die-cast aluminum, resistant to corrosion.
Painting	Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment).
Screws	AISI 304 stainless steel screws.
Seals	Silicone Rubber.
Standard Colour	GR graphite satin finish
Option colors	AL aluminium grey



Dimensions

Total device width (mm)	85
Total device length (mm)	190
Weight (kg)	1
Volume piece packed (m³)	0.003





Optical System

Optical System	Safety tempered glass.
Beam	asymmetrical
Emission	direct
Reflectors	Extra-pure aluminium reflector.
Adjustable	No



Photometrics

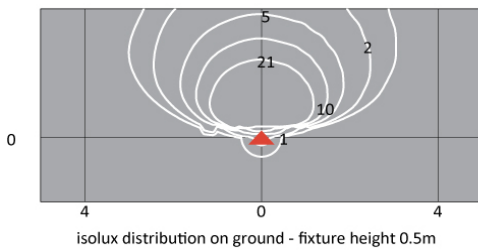

Sources


MacAdam	Step 3
Output Flux	432 lm
Source type	LED
System power	6W
Temperature Colour	3000K CRI>80

Electrical

Ballast type	DALI
Frequency	50-60Hz
Lifetime	50.000h L80B50 (Ta=25°C)
Line input	Line entry: use only H07RN-F cable (EN 60598-1) with diameter between 7,5 and 12mm.
Mounting ballast type	Integral
Voltage	220-240V
Separate ignition	No
Emergency 1E	No
Emergency 3E	No

Optional Accessories


Rough-in housing



D51/0-CI


For models D51 thor/0. Rough-in housing high stress resistance composite technopolymer.

Mounting




D51/0-MS-AL

For models D51 thor/0. Wall bracked installation. -AL ALUMINIUM



D51/0-MS-GR

For models D51 thor/0. Wall bracked installation. -GR GRAPHITE



D51/0-LD

For models D51 thor/0. Acid-etched glass.