

THOR D51 / D51 THOR/2 / THOR/2 LED / D51/2-EL84-GR

Product Info

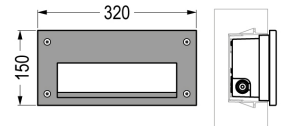


Item code	THOR D51 / D51/2-EL84-GR
Category	Step light, Wall recessed
Environments	urban landscape, façades and architectural works, wellness, hallway, places of worship
Mounting type	with rough-in housing
Body	High impact resistant composite technopolymer body. Frame in die-cast aluminum, resistant to corrosion.
Painting	Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment).
Screws	AISI 304 stainless steel screws.
Seals	Silicone Rubber.
Standard Colour	GR graphite satin finish
Option colors	AL aluminium grey



Dimensions

Total device width (mm)	150
Total device length (mm)	320
Weight (kg)	1.6
Volume piece packed (m³)	0.006

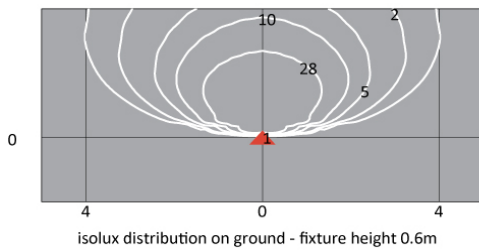



Optical System

Optical System	Safety tempered glass.
Beam	asymmetrical
Emission	direct
Reflectors	Extra-pure aluminium reflector.
Adjustable	No



Photometrics



Sources


MacAdam	Step 3
Output Flux	635 lm
Source type	LED
System power	10,5W
Temperature Colour	4000K CRI>80

Electrical

Ballast type	DALI
Frequency	50-60Hz
Lifetime	50.000h L80B50 (Ta=25°C)
Line input	Cable entry: predisposed for daisy chain wiring, internal derivation - terminal block screws 3x2,5mm ² use only (EN 60598-1) cable type H07RN-F with diameter between 7,5 and 12mm.
Mounting ballast type	Integral
Voltage	220-240V
Separate ignition	No
Emergency 1E	No
Emergency 3E	No


Optional Accessories

Rough-in housing


**D51/2-CI**

For models D51 thor/2. Rough-in housing high stress resistance composite technopolymer.


Mounting

**D51/2-MS-AL**

For models D51 thor/2. Wall bracked installation. -AL ALUMINIUM

**D51/2-MS-GR**

For models D51 thor/2. Wall bracked installation. -GR GRAPHITE

**D51/2-LD**

For models D51 thor/2. Acid-etched glass.