


INDEX+




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured

Series of bollards, comprising:

- Die-cast aluminium cover painted prior chemical preparation of the surface
- UV stabilised transparent polycarbonate diffuser
- UV and heat stabilised high-transparency polycarbonate optics. The optical unit compartment features superior heat dissipation and IK10-rated impact resistance grating specific light distributions
- Aluminium heat sink
- Anti-ageing custom moulded silicone sealing gasket(s)
- Technopolymer cable compartment cover
- Stainless steel locking hardware
- Each luminaire is supplied with two IP 68 cable gland allowing a single or a through power connection
- Die-cast aluminium floor mount base polyester powder coat finish prior chemical surface conversion
- AISI 304 stainless steel sheet metal sturdy bases for floor mounting are available as accessories. For purpose illumination: promoting safe navigation through campuses, car parks and public spaces
- Concrete installation fixing rods are available as accessories. Compatible with standard die-cast aluminium and optional stainless steel heavy use (HU) baseplates

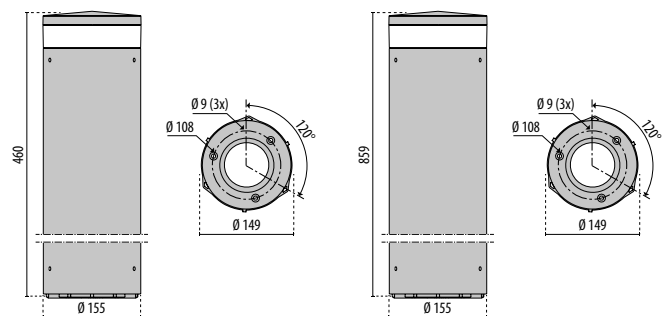

INDEX+
46

INDEX+
86

INDEX+ 46 C/EW

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
13	II	-	80	4000	C/EW	-	2250	1605	■	3121557	✓
13	II	-	80	3000	C/EW	-	2130	1547	■	3121556	✓
13	II	-	80	4000	C/EW	-	2250	1605	■	3121559	✓
13	II	-	80	3000	C/EW	-	2130	1547	■	3121558	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
13	II	-	80	4000	C/EW	-	2250	1605	■	3121561	✓
13	II	-	80	3000	C/EW	-	2130	1547	■	3121560	✓
13	II	-	80	4000	C/EW	-	2250	1605	■	3121563	✓
13	II	-	80	3000	C/EW	-	2130	1547	■	3121562	✓



INDEX+ 86 C/EW

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
17	II	-	80	4000	C/EW	-	3120	2120	■	3121549	✓
17	II	-	80	3000	C/EW	-	2870	2049	■	3121548	✓
17	II	-	80	4000	C/EW	-	3120	2120	■	3121551	✓
17	II	-	80	3000	C/EW	-	2870	2049	■	3121550	✓
13	II	-	80	4000	C/EW	-	2250	1605	■	3121748	✓
13	II	-	80	3000	C/EW	-	2130	1547	■	3121747	✓
13	II	-	80	4000	C/EW	-	2250	1605	■	3121750	✓
13	II	-	80	3000	C/EW	-	2130	1547	■	3121749	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
17	II	-	80	4000	C/EW	-	3120	2120	■	3121553	✓
17	II	-	80	3000	C/EW	-	2870	2049	■	3121552	✓
17	II	-	80	4000	C/EW	-	3120	2120	■	3121555	✓
17	II	-	80	3000	C/EW	-	2870	2049	■	3121554	✓
13	II	-	80	4000	C/EW	-	2250	1605	■	3121752	✓
13	II	-	80	3000	C/EW	-	2130	1547	■	3121751	✓
13	II	-	80	4000	C/EW	-	2250	1605	■	3121754	✓
13	II	-	80	3000	C/EW	-	2130	1547	■	3121753	✓




Optional accessories


DESCRIPTION	COLOR	PART NUMBER	UKCA
INDEX+			
AISI 316 stainless steel floor installation base		3114401	✓
AISI 316 stainless steel floor installation base		3114402	✓
Concrete mounting adaptor with stainless steel plate and galvanised steel rods		14049320	✓



3114401



3114402



14049320