



light source

LED
 colour temperature , 3000-6500 K
 Energy efficiency category A/A+/A++
 LED

work equipment
connected load
Power consumption
power factor

colour temperature , 4000 K
 Energy efficiency category A/A+/A++
 electronic ballast
 220-240 V; 50/60 Hz
 approx. 103 W
 approx. 0,965

luminous flux
luminous efficacy
light distribution
direct ratio
colour temperature
color rendering index (CRI)

approx. 14250 lm
 approx. 138 lm/W
 direct/indirect
 approx. 12 %
 adjustable white
 >= 80

glare control
luminance (L65)
unified glare rating (4H 8H)

conical prismatic screen
 <= 3000 cd/m²
 <= 10

technology
operation

presence and daylight sensor control (PIR)
 multi-function switch

luminaire body
lamp cover
tubular section

steel/plastic, painted, white
 Acrylic satine
 white

luminaire base
weight (net)
mains lead

C-form flat
 approx. 19.7 kg
 approx. 3,0 m; mains plug
 CEE 7/II



Fastening
decorative contrast side parts
special features

flint grey
 luminaire head detachable, Cradle to Cradle Certified TM,
 Direct light component with edge light and light-guide
 technology for homogenous light exit, Indirect light
 component biodynamic light VTL; direct light component
 neutral working light, integrated light and presence sensor
 PIR, integrated light management for biodynamic light VTL,



CEE 7/II

luminous intensity

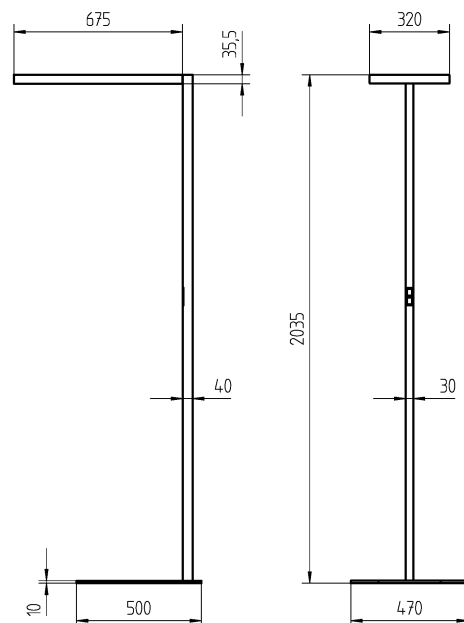

retrofittable with TALK module



CEE 7/II

luminous intensity

