
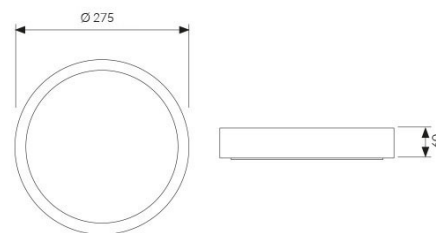


MOON MEDIUM

Impact resistant polycarbonate diffuser. Built-in driver.

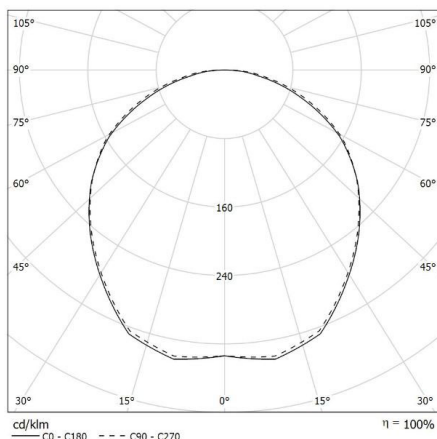

CODE		FLUX	SIZE	CERTIFICATIONS
51PO25L3M65	25W 3000K	2340lm	Ø 275mm	   

Optic

Impact resistant polycarbonate diffuser.

Body

Polycarbonate body.

Specifications

SMD LED Technology

Built-in driver;

CRI>90;

McAdams 3;

Life Time: L80/B10 >50.000h;

5 years complete warranty;

Eye safety: RG0/RG1 in accordance with EN62471:2009

Legal References

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97