


# NORMA+



Scan the QR-code for the latest information


■ GR-RAL7035 / Grey RAL7035 / Matt

Weatherproof LED luminaire, comprising:

- UV stabilised co-extruded polycarbonate body with double finish; satin-finish for the optical compartment and matte finish for the auxiliary electrical compartment
- Technopolpolymer end caps
- Anti-ageing custom moulded silicone sealing gasket(s)
- Tool-less bayonet opening polycarbonate cap for mains connection
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Aluminium heat sink
- Stainless steel springs for quick installation
- The CL (Continuous Line) versions are suitable for through wiring continuous line installations (5x2,5 mm<sup>2</sup>)
- EM versions are complete with emergency device that can operate on battery for 1 hour. Product can be used for general or emergency lighting



ABI BV production facilities- Haarlem - Netherlands

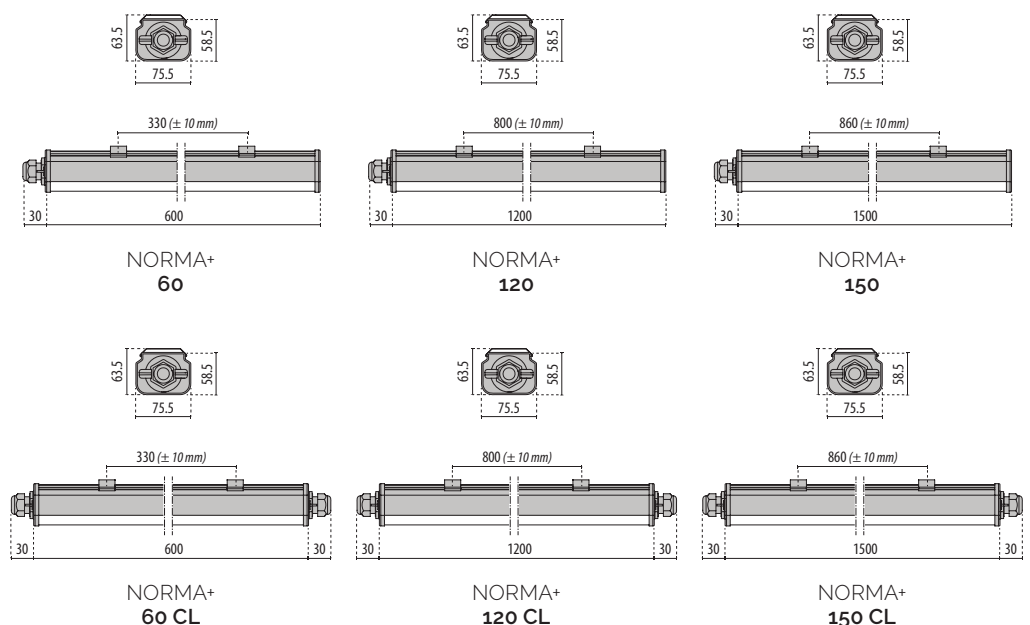

## NORMA+ 60

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	LENGTH [mm]	PART NUMBER	UKCA
<b>Power LED 220-240 V 50/60 Hz</b>												
23	I	-	80	4000	S/EW	-	4662	3300	■	630	<b>305949</b>	✓
16	I	-	80	4000	S/EW	-	3261	2836	■	630	<b>305948</b>	✓



## NORMA+ 60 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	LENGTH [mm]	PART NUMBER	UKCA
<b>Power LED 220-240 V 50/60 Hz</b>												
23	I	-	80	4000	S/EW	-	4662	3300	■	660	<b>305941</b>	✓
16	I	-	80	4000	S/EW	-	3261	2836	■	660	<b>305940</b>	✓
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>												
23	I	-	80	4000	S/EW	-	4662	3300	■	660	<b>305989</b>	✓
16	I	-	80	4000	S/EW	-	3261	2836	■	660	<b>305988</b>	✓



## NORMA+ 120

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	LENGTH [mm]	PART NUMBER	UKCA
<b>Power LED 220-240 V 50/60 Hz</b>												
34	I	-	80	4000	S/EW	-	6153	5215	■	1230	<b>305952</b>	✓
25	I	-	80	4000	S/EW	-	3775	3002	■	1230	<b>305950</b>	✓
25	I	-	80	4000	S/EW	-	4315	3753	■	1230	<b>305951</b>	✓

PRO versions are available on web



## NORMA+ 120 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	LENGTH [mm]	PART NUMBER	UKCA
<b>Power LED 220-240 V 50/60 Hz</b>												
34	I	-	80	4000	S/EW	-	5996	5215	■	1260	<b>305944</b>	✓
25	I	-	80	4000	S/EW	-	3775	3002	■	1260	<b>305942</b>	✓
25	I	-	80	4000	S/EW	-	4315	3752	■	1260	<b>305943</b>	✓
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>												
34	I	-	80	4000	S/EW	-	6153	5215	■	1260	<b>305992</b>	✓
25	I	-	80	4000	S/EW	-	3775	3002	■	1260	<b>305990</b>	✓
25	I	-	80	4000	S/EW	-	4428	3752	■	1260	<b>305991</b>	✓
<b>Power LED - emergency 1h - 220-240 V 50/60 Hz</b>												
34	I	-	80	4000	S/EW	-	6153	5215	■	1260	<b>306000</b>	✓
25	I	-	80	4000	S/EW	-	3261	2836	■	1260	<b>305998</b>	✓
25	I	-	80	4000	S/EW	-	4428	3752	■	1260	<b>305999</b>	✓

PRO versions are available on web



## NORMA+ 150

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	LENGTH (mm)	PART NUMBER	UKCA
<b>Power LED 220-240 V 50/60 Hz</b>												
76	I	-	80	4000	S/EW	-	12977	10998	■	1500	<b>3122630</b>	✓
50	I	-	80	4000	S/EW	-	8768	7625	■	1530	<b>305954</b>	✓

PRO and 6500 K versions are available on web  
76 W models available from July 2024



## NORMA+ 150 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	LENGTH (mm)	PART NUMBER	UKCA
<b>Power LED 220-240 V 50/60 Hz</b>												
76	I	-	80	4000	S/EW	-	12977	10998	■	1560	<b>3122533</b>	✓
59	I	-	80	4000	S/EW	-	10742	9104	■	1560	<b>305947</b>	✓
50	I	-	80	4000	S/EW	-	8768	7625	■	1560	<b>305946</b>	✓
29	I	-	80	4000	S/EW	-	5285	4295	■	1560	<b>305945</b>	✓

### Power LED - dimmable DALI 220-240 V 50/60 Hz

76	I	-	80	4000	S/EW	-	12977	10998	■	1560	<b>3122534</b>	✓
59	I	-	80	4000	S/EW	-	10742	9104	■	1560	<b>305995</b>	✓
50	I	-	80	4000	S/EW	-	8768	7625	■	1560	<b>305994</b>	✓
29	I	-	80	4000	S/EW	-	5285	4295	■	1560	<b>305993</b>	✓

### Power LED - emergency 1h - 220-240 V 50/60 Hz

76	I	-	80	4000	S/EW	-	12977	10998	■	1560	<b>3122535</b>	✓
59	I	-	80	4000	S/EW	-	10742	9103	■	1560	<b>306003</b>	✓
50	I	-	80	4000	S/EW	-	8768	7625	■	1560	<b>306002</b>	✓
29	I	-	80	4000	S/EW	-	5285	4295	■	1560	<b>306001</b>	✓

PRO and 6500 K versions are available on web  
76 W models available from July 2024





Palaleonessa - Brescia - Italy