





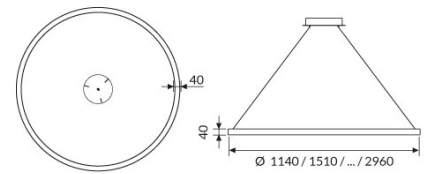

ONE RING PG

Decorative technical element with various diameters, direct emission. UGR<22

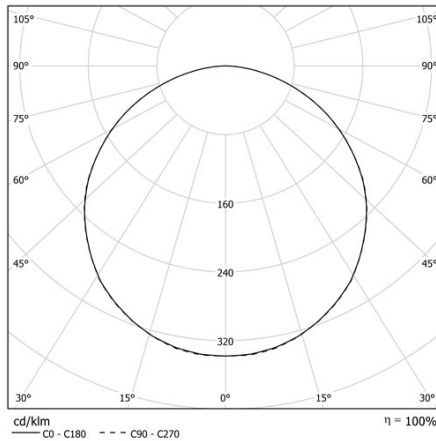

| CODE |  | FLUX | SIZE | CERTIFICATIONS |
|----------|---|--------|-------|---|
| 17PG39K4 | 39W 4000K | 4173lm | 790mm |      |

Optics

Methacrylate satin diffuser for soft diffusion with UGR<22

Body

Manufactured from extruded aluminum with epoxy powder coating.

Specifications

CRI>90
McAdams 3
Life Time: L80/B10 >50.000h
5 years complete warranty
Eye safety: RG0/RG1 in accordance with EN62471:2009

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97