





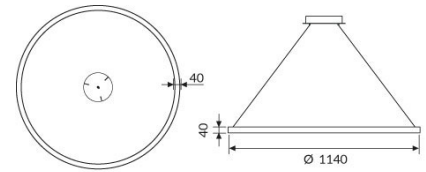


ONE RING PG

Decorative technical element with various diameters, direct emission. UGR<22

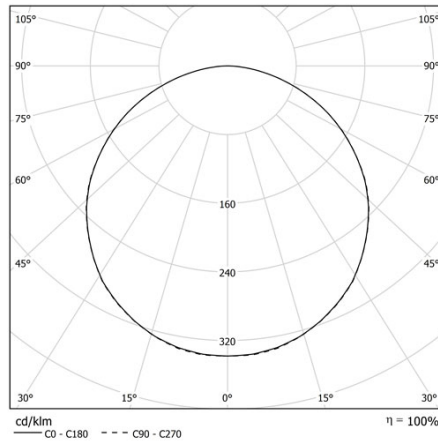

CODE		FLUX	SIZE	CERTIFICATIONS
17PG58K4	58W 4000K	6216lm	1140mm	   

Optics

Satin methacrylate diffuser for homogeneous emission UGR<22.

Technical features

- >107 lm/W
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B20 >80.000h
- 5 years warranty

Body

Aluminum with epoxy powder coating.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97