


CE



CEE 7/VII

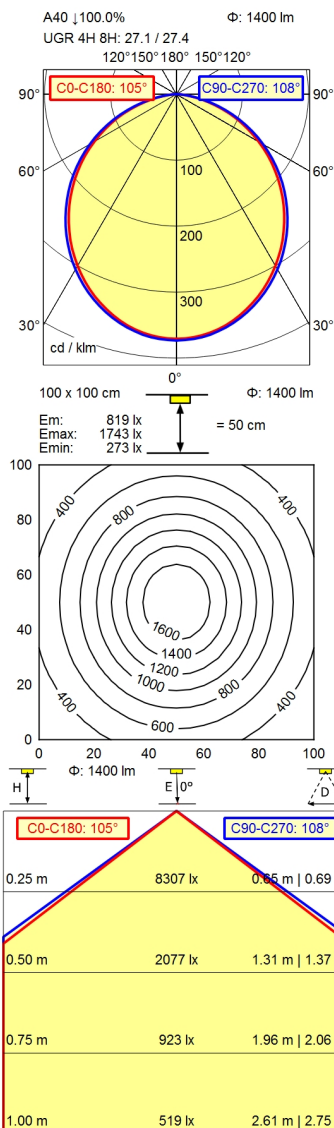

light source
work equipment
connected load
secondary tension
power consumption
sec. power consumption
luminous flux
luminous efficiency
light type/-color
colour temperatur
color rendering index
light distribution
direct ratio
beam angle
chromaticity tolerance LED
luminance (L65)
unified glare rating (4H 8H)
system of protection
class of protection
technology
operation
housing
Light source cover
arm
balance of articulation joints
weight (net)
mains lead
fastening
decorative contrast side parts

LED
 electronic transformer
 100 - 240 V; AC; 50 Hz; 60 Hz
 24 V
 ca. 23 W
 ca. 20 W
 approx. 1.400 lm
 approx. 70 lm/W
 adjustable white
 approx. 3.000 K; 4.000 K; 5.000 K; 6.500 K
 CRI \geq 90; R9 \geq 50
 direct
 approx. 100 %
 110°
 < 3 SDCM
 \leq 23.000 cd/m²
 \leq 28
 IP 20
 I with plug-in power supply; III without plug-in power supply
 Touch DIM
 multi-function switch
 aluminium coloured anodised
 milky; plastic
 silver metallic
 spring
 ca. 1,9 kg
 ca. 3,4 m; mains plug; CEE 7/VII
 tap16; table clamp (accessory); screw-down flange
 black

Arm-mounted luminaire TANE0
TND 1400/930-965/D
113735000-00810082

