


CE



CEE 7/VII

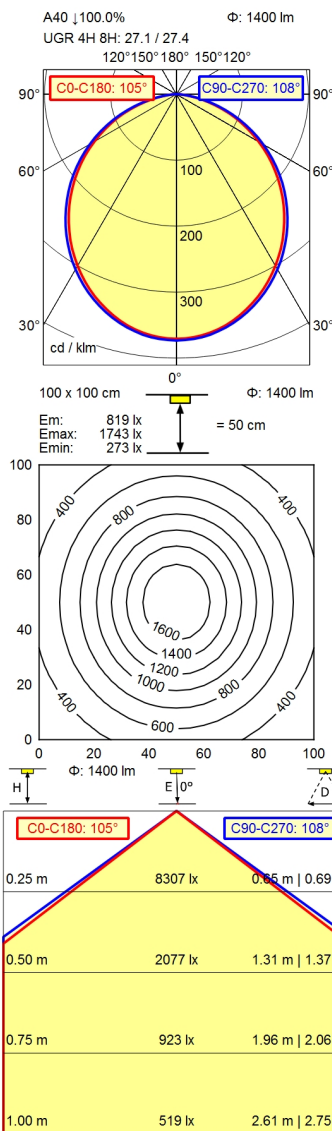

- light source
- work equipment
- connected load
- secondary tension
- power consumption
- sec. power consumption
- luminous flux
- luminous efficiency
- light type/-color
- colour temperatur
- color rendering index
- light distribution
- direct ratio
- beam angle
- chromaticity tolerance LED
- luminance (L65)
- unified glare rating (4H 8H)
- system of protection
- class of protection
- technology
- operation
- housing
- cover
- weight (net)
- mains lead
- design
- fastening
- special features

- LED
- electronic transformer
- 100 - 240 V; alternating current (AC); 50 Hz; 60 Hz
- 24 V
- ca. 23 W
- ca. 19 W
- approx. 1.400 lm
- approx. 73 lm/W
- cold white
- approx. 5.000 K
- CRI \geq 90; R9 \geq 50
- direct
- approx. 100 %
- 110°
- < 3 SDCM
- \leq 23.000 cd/m²
- 005
- IP 20
- I with plug-in power supply; III without plug-in power supply
- continuously dimmable; Touch DIM
- multi-function switch
- sectional aluminium; anodised; aluminium coloured anodised
- Polycarbonate (PC); milky
- ca. 1,4 kg
- ca. 4,7 m; mains plug; CEE 7/VII
- mounted version
- screw-down bracket, horizontal
- fixed connection

