




## TERES PRO LV PC

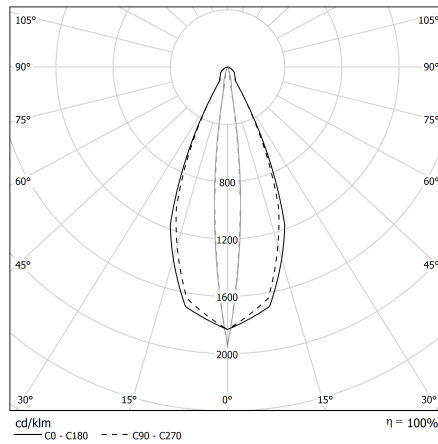

CODE		FLUX	SIZE	CERTIFICATIONS
14PC21K315LV	21W 15° 3000K	2135lm	Ø 50mm	  

### Optic

PC lens 15°-24°-36°-50°.

### Body

Die-cast aluminum with epoxy powder coating.

### Technical features

- Built-in driver
- 48V DC operation
- >80 lm/W
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h
- 5 years warranty

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97