

CE





CEE 7/XVI



BS 1363



NEMA 1-15P

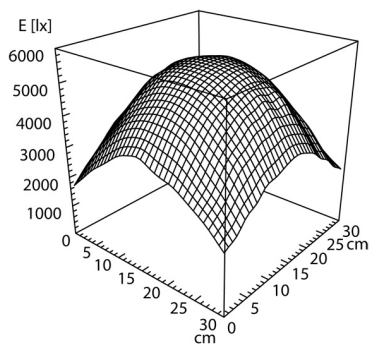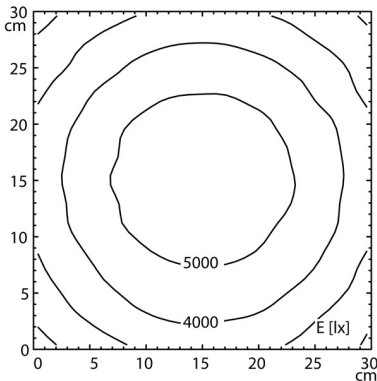

Light source	LED
Work equipment	Electronic plug-in ballast
Connected load	100 - 240 V; AC; 50 Hz; 60 Hz
Secondary tension	24 V
Power consumption	ca. 13 W
Sec. power consumption	ca. 11 W
Luminous flux	approx. 750 lm
Luminous efficiency ¹⁾	approx. 68 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 5.000 K
Color rendering index	CRI ≥ 90; R9 ≥ 50
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	without
System of protection/Class	IP 20; II with plug-in power supply, III without plug-in power supply
Technology	Multi-stage switchable; Continuously dimmable; Touch DIM
Operation	Multi-function switch
Housing	Plastic; Untreated; Black
Light source cover	Polyamide; Milky
Arm	Tubular aluminium section; Anodized; Aluminium coloured anodised
Balance of articulation joints	Spring
Mains lead	ca. 3,6 m; Mains plug; CEE 7/XVI; BS 1363; NEMA 1-15P
Fastening	Screw-down flange
Lens, dimensions	Ø 160 mm
Lens material	Glass
Diopter lens	3,5 DPT
EAN	4013330125479
Weight without/incl. packaging	ca. 2,5 kg; 4,2 kg
Dimensions (dimensional drawing)	A = 384 mm, B = 400 mm
Packaging dimensions	ca. 865 mm; 420 mm; 102 mm
Special features	Antireflective glass lens; Light characteristic can be adjusted with a 3-way switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear