





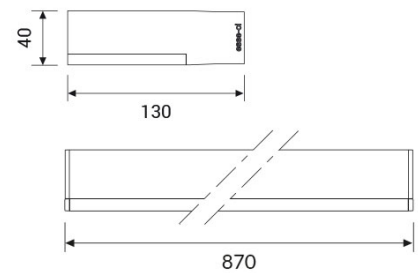


UPLIK WALL Long Double emission

PG diffuser (UGR<22). Double emission: direct/indirect.

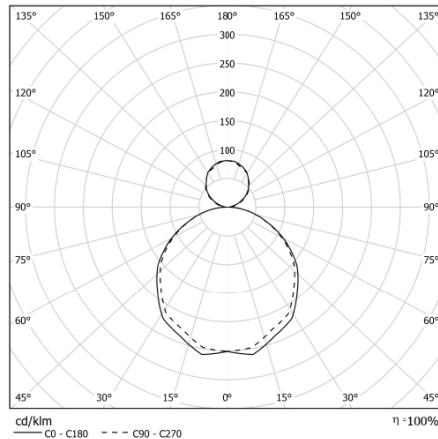

CODE		FLUX	SIZE	CERTIFICATIONS
76DI93K4XPL	93W 4000K	7568lm	870mm	   

Optic

Lower methacrylate satin antistatic diffuser screen, UGR<22. LIC (Lateral indirect Control) technology and upper PG protective diffuser for dual emission: direct / indirect.

Specifications

Built-in Driver;
CRI>90;
Mac Adams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Aluminum extruded body with epoxy powder coating.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97