
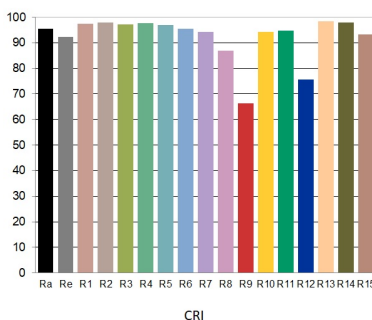
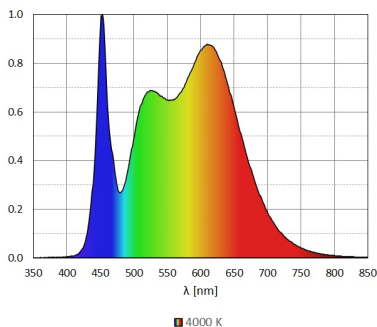


C53 | 44.6% ↑ 55.4% Φ: 6400 lm
UGR 4H 8H: 14.3 / 14.3



Work equipment
Connected load
Power consumption
Luminous flux
Luminous efficiency
Light type/-color
Colour temperatur
Color rendering index
Light distribution
Direct ratio
Glare control
Luminance (L65)
Unified glare rating (4H 8H)
System of protection
Class of protection
Technology
Operation
Housing
Light source cover
Weight (net)
Mains lead
Fastening
Configuration
Maximum ambient temperature
Special features

Power supply unit
220 - 240 V; 50 Hz; 60 Hz
ca. 53 W
approx. 6.400 lm
approx. 120 lm/W
Cold white
approx. 4.000 K
CRI ≥ 90; R9 ≥ 50
Direct/indirect
approx. 45 %
Conical prismatic screen
≤ 2.800 cd/m²
≤ 16
IP 20
I
Two-stage switchable; Continuously dimmable;
DALI
External
Aluminium; Painted; White
Acrylic (PMMA); Satine
ca. 5,5 kg
ca. 2 m; Connector; 5 pin
Ceiling mounted
Single Luminaire
25 °C
Power cable red; Separated, direct and indirect
light individually adjustable; DALI Load 2x; Suitable
as emergency lighting