


Wall-mounted luminaire ZERA ZEW 3000/830/D

114481000-00812327


Waldmann **W**

ENGINEERS OF LIGHT

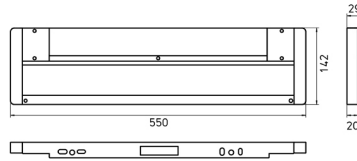

CE

 5 pin

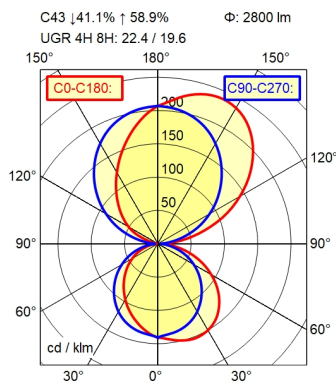

work equipment

connected load

power consumption

luminous flux

luminous efficiency

light type/-color

colour temperatur

color rendering index

light distribution

direct ratio

chromaticity tolerance LED

glare control

system of protection

class of protection

technology

operation

housing

Light source cover

weight (net)

mains lead

design

fastening

maximum ambient temperature

special features

electronic ballast dimable digital

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 18 W

approx. 2.800 lm

approx. 155 lm/W

warm white

approx. 3.000 K

CRI \geq 80

direct/indirect

approx. 41 %

< 3 SDCM

see luminaire type

IP 20

I

continuously dimmable

external

sectional aluminium; anodised; aluminium

coloured anodised

Acrylic (PMMA); white opal

ca. 6,9 kg

connector; 5 pin

mounted version

wall bracket

25 °C

asymmetric radiation; DALI Load 1x; Suitable as emergency lighting