


# Wall-mounted luminaire ZERA ZEW 6000/840/D


114474000-00812395

# Waldmann **W**

ENGINEERS OF LIGHT

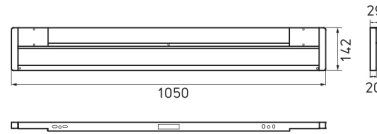

5 pin

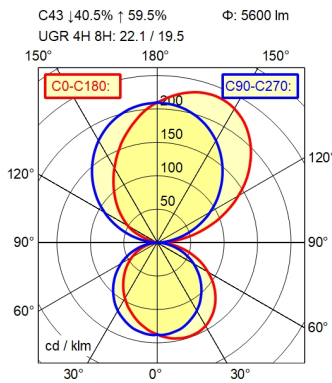

**work equipment**

**connected load**

**power consumption**

**luminous flux**

**luminous efficiency**

**light type/-color**

**colour temperatur**

**color rendering index**

**light distribution**

**direct ratio**

**chromaticity tolerance LED**

**glare control**

**system of protection**

**class of protection**

**technology**

**operation**

**housing**

**Light source cover**

**weight (net)**

**mains lead**

**design**

**fastening**

**maximum ambient temperature**

**special features**

adjustable electronic ballast, digital DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 40 W

approx. 5.600 lm

approx. 140 lm/W

cold white

approx. 4.000 K

CRI ≥ 80

direct/indirect

approx. 41 %

< 3 SDCM

see luminaire type

IP 20

I

continuously dimmable

external

sectional aluminium; anodised; aluminium

coloured anodised

Acrylic (PMMA); white opal

ca. 3,3 kg

connector; 5 pin

mounted version

wall bracket

25 °C

asymmetric radiation; DALI Load 1x; Suitable as emergency lighting